




版本	设计变更	日期	会签
A	新品打样	2025. 12. 8	YYK

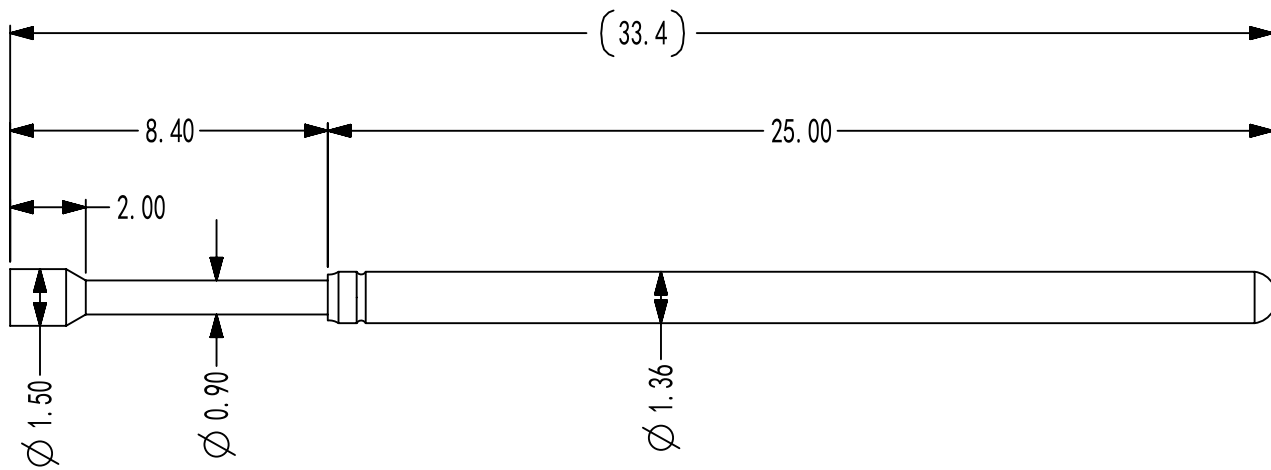

General data	
Pitch	≥ 1.27 mm
Temperature	-45° C to +80° C
Contacting from	Pin, Posts, Screw
Mechanical specifications	
Plunger	BeCu-Au plated
Barrel	Phosphor - Au plated
Spring	Music wire - Au plated
Nominal travel	4.3mm
Maximum travel	6.35mm
Spring force	100g \pm 20%@4.3mm
Pointing accuracy	± 0.08 mm
Mechanical life	100k cycles
Electrical specifications	
Continuous current	3A
Contact resistance	MAX. 100m Ω

Drawn	YYK	2025. 12. 8	Scale	5:1	Series: RC100	Group: ICT/FCT Probe
Checked	YYK	2025. 12. 8	Sheet	1 of 1	Title: RC100G150B100L3340	
Approved	ERIC	2025. 12. 8	Unit	mm		
Size	A4	REV.	A	Note:	 利科未来 THIS DRAWING IS A CONTROLLED DOCUMENT.	
 Tolerances Unless Otherwise Specified: 0 PLC ± 0.15 1 PLC ± 0.10 2 PLC ± 0.05 3 PLC ± 0.01						