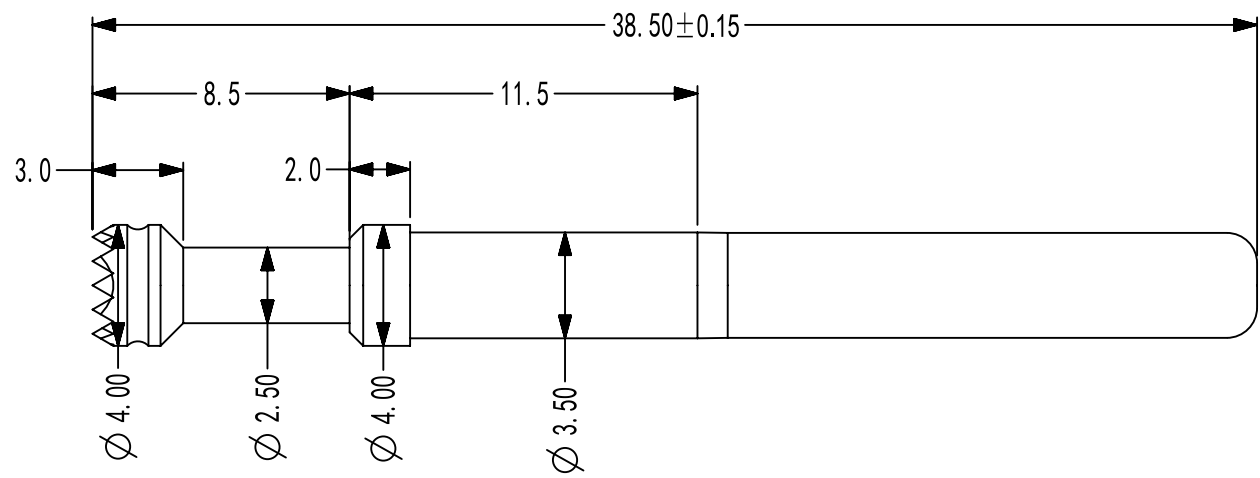



版本	设计变更	日期	会签
A	新品打样	2023. 10. 27	YYK

A

B

C





D

E

F

General data	
Pitch	≥5.08mm
Temperature	-45° C to +80° C
Contacting from	Posts
Mechanical specifications	
Plunger	BeCu- Au plated
Barrel	Brass - Au plated
Spring	Music wire - Au plated
Nominal travel	4.4mm
Maximum travel	5.5mm
Spring force	300g±20%@4.4mm
Pointing accuracy	±0.08mm
Mechanical life	100k cycles
Electrical specifications	
Continuous current	Max. 50A
Contact resistance	Max. 10mΩ

Drawn	YYK	2023. 10. 27	Scale	5:1	Series:RCH150	Group: High Current	
Checked	YYK	2023. 10. 27	Sheet	1 of 1	Title: RCH150IA400B300L3850		
Approved	ERIC	2023. 10. 27	Unit	mm			
Size	A4	REV.	A	Note:	 利科未来 THIS DRAWING IS A CONTROLLED DOCUMENT.		
				Tolerances Unless Otherwise Specified: 0 PLC ±0.15 1 PLC ± 0.10 2 PLC ±0.05 3 PLC ± 0.01			

1 | 2 | 3 | 4 | 5 | 6 | 7 | 8